

# SECURE WHITE

## KAQ CENTRE PIVOT BURGLARY-RESISTANT ROOF WINDOW



VARIANT	1010Q
<b>PANE</b>	
Construction	33.4-16-4H
Thickness of glazing (mm)	26
Low E	✓✓
Gas	Argon
Toughened	✓
Laminated	✓
$U_g$ (W/m <sup>2</sup> K)	1.0
Total solar energy transmittance	0.52
<b>WINDOW</b>	
$U_w$ (W/m <sup>2</sup> K)	1.3
Water tightness	E1350
Air permeability	Class 4
Resistance to wind load	C4*
Sound reduction	34 (-1,-4) dB
Ventilation valve	✓
<b>COLOUR</b>	
White painted	✓

\* M8A, P8A, P10A, S8A: no performance data



NEXT 20  
GUARANTEE



MAX PROTECT



THERMOSTAT



MASTER WOOD



SAFE GUARD



WHITE DESIGN

### APPLICABLE

- In public and residential buildings
- In heated, inhabited rooms
- In roof pitch range of 15°-90°
- Suitable on all common roofings with proper flashing

### FEATURES

- Centre pivot roof window
- Class P4A security glazing (according to EN 356 harmonized European standard)
- Toughened external pane
- Laminated internal pane with 4 layers of tear resistant foil
- RC2 burglary resistance classification according to EN 1627 harmonized European standard
- Glued pane to the sash to disallow the pane dismantling
- Reinforced hinges
- Two discreet locks for increased security
- Two passive ventilation positions via handle
- Ventilation valve
- Extra welded sliding gasket
- Two Low-E coatings
- Easy installation
- 10 + 10 year guarantee

### MATERIAL

- Kiln-dried laminated pine wood
- Timber from FSC certified forests
- Fungicide protection
- Double layer water based lacquer

### COVER PARTS

- Aluminium, lacquered, grey colour (RAL 7043)

### HINGE

- Reinforced pivot hinge



# TECHNICAL DATA

## MEASURES [cm]

CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m <sup>2</sup>
KAQ C2A	55x78	55	77.8	39.8	64.9	37.3	59	0.220
KAQ C4A	55x98	55	97.8	39.8	84.9	37.3	79	0.295
KAQ M4A	78x98	78	97.8	62.8	84.9	60.3	79	0.476
KAQ M6A	78x118	78	117.8	62.8	104.9	60.3	99	0.597
KAQ M8A	78x140	78	139.8	62.8	126.9	60.3	121	0.729
KAQ P6A	94x118	94.2	117.8	78.8	104.9	76.3	99	0.755
KAQ P8A	94x140	94.2	139.8	78.8	126.9	76.3	121	0.925
KAQ P10A	94x160	94.2	160	79	147	76.5	141.2	1.08
KAQ S6A	114x118	114	117.8	98.8	104.9	96.3	99	0.953
KAQ S8A	114x140	114	139.8	98.8	126.9	96.3	121	1.165

## BLIND COMPATIBILITY TABLE


CODE	ROLLER BLIND	VENETIAN BLIND	ANTI-HEAT BLIND	SOLAR ROLLER SHUTTER
KAQ C2A	RHA CXA	PAA C2A	MIA CXA	SSR C2A
KAQ C4A	RHA CXA	PAA C4A	MIA CXA	SSR C4A
KAQ M4A	RHA MXA	PAA M4A	MIA MXA	SSR M4A
KAQ M6A	RHA MXA	PAA M6A	MIA MXA	SSR M6A
KAQ M8A	RHA MXA	PAA M8A	MIA MXA	SSR M8A
KAQ P6A	RHA PXA	PAA P6A	MIA PXA	SSR P6A
KAQ P8A	-	-	MIA PXA	SSR P8A
KAQ P10A	-	-	-	SSR P10A
KAQ S6A	RHA SXA	PAA S6A	MIA SXA	SSR S6A
KAQ S8A	RHA SXA	PAA S8A	MIA SXA	SSR S8A

## FLASHING COMPATIBILITY TABLE

CODE	SLATE FLASHING with soaker elements 0-16mm [2x8mm]	SLATE FLASHING with one-piece element 0-16mm [2x8mm]	TILE FLASHING (16-50mm)	INTERLOCKING FLAT TILE FLASHING (0-16mm)	UNIVERSAL FLASHING (16-120mm)	STANDING SEAM FLASHING (max 40mm profile height)	PLAIN TILE FLASHING 0-28mm [2x14mm]
KAQ C2A	KSF C2A	KLS C2A	KTF C2A	KFT C2A	KUF C2A	KSS C2A	KFP C2A
KAQ C4A	KSF C4A	KLS C4A	KTF C4A	KFT C4A	KUF C4A	KSS C4A	KFP C4A
KAQ M4A	KSF M4A	KLS M4A	KTF M4A	KFT M4A	KUF M4A	KSS M4A	KFP M4A
KAQ M6A	KSF M6A	KLS M6A	KTF M6A	KFT M6A	KUF M6A	KSS M6A	KFP M6A
KAQ M8A	KSF M8A	KLS M8A	KTF M8A	KFT M8A	KUF M8A	KSS M8A	KFP M8A
KAQ P6A	KSF P6A	KLS P6A	KTF P6A	KFT P6A	KUF P6A	KSS P6A	KFP P6A
KAQ P8A	KSF P8A	KLS P8A	KTF P8A	KFT P8A	KUF P8A	KSS P8A	-
KAQ P10A	-	-	-	-	KUF P10A	-	-
KAQ S6A	KSF S6A	KLS S6A	KTF S6A	KFT S6A	KUF S6A	KSS S6A	KFP S6A
KAQ S8A	KSF S8A	KLS S8A	KTF S8A	KFT S8A	KUF S8A	-	KFP S8A

For Combi flashing compatibility please visit [www.dakea.com](http://www.dakea.com).


## PANE CONSTRUCTION

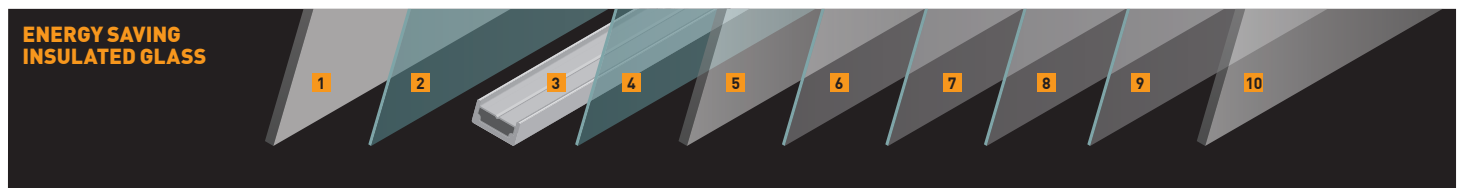

1: 4 mm toughened safety glass 2, 4: Low-E coating [reflects heat] 3: Argon gas filled cavity 5, 10: 3 mm float glass 6, 7, 8, 9: Four layers of tear resistant foil

## AVAILABLE SIZES [cm]

C2A	C4A	M4A	M6A	M8A	P6A	P8A	P10A	S6A	S8A
55x78	55x98	78x98	78x118	78x140	94x118	94x140	94x160	114x118	114x140

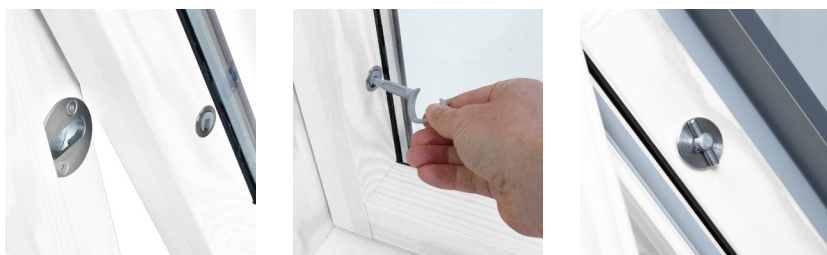

[www.dakea.com](http://www.dakea.com)

Roof windows for **smart professionals**

We reserve the right to change the technical specifications.